


Fitting (see front cover)

Take an 8' length of dowel or similar (obtainable from your DIY store). Screw the enclosed cup hook into the end.

Standing on steps waist height to your guttering, by hooking the link cord draw the whole shade up from the front onto the roof with the two sides split either side of the roof. Drop the link cord behind the cresting at the wall end or onto a hook plugged into the wall at ridge height.

Plug screw eyes enclosed into the wall just below gutter level each side. Hook on shade at places illustrated on front cover, shortening the shock cords as necessary (see below), or using two new adjustable tensioners per eyelet if supplied.

Three ways of using shock cord tensioners

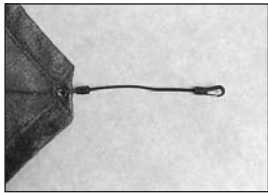

PREFERRED OPTION

Long reach – use single cord to stretch over the gutter to a fixing hidden underneath



Double hooks – the hooks are used to grip the roof sheet edges overhanging the gutter either side of the corner



Reverse looping – hooking the shock cord loop over an inverted (upside down) J hook or other

Shortening a tensioner to fit




Withdraw the collar from a hook. *Pull (!)* out cord. Cut to desired length. Push in cord and snap on collar. Do not *overshorten!*

UKOZ, 5 Howard Lane, Boughton, Northampton NN2 8RS


Tel: 01604 842220

IF YOU HAVE ANY DIFFICULTY, SIMPLY RING

www.koalashade.co.uk

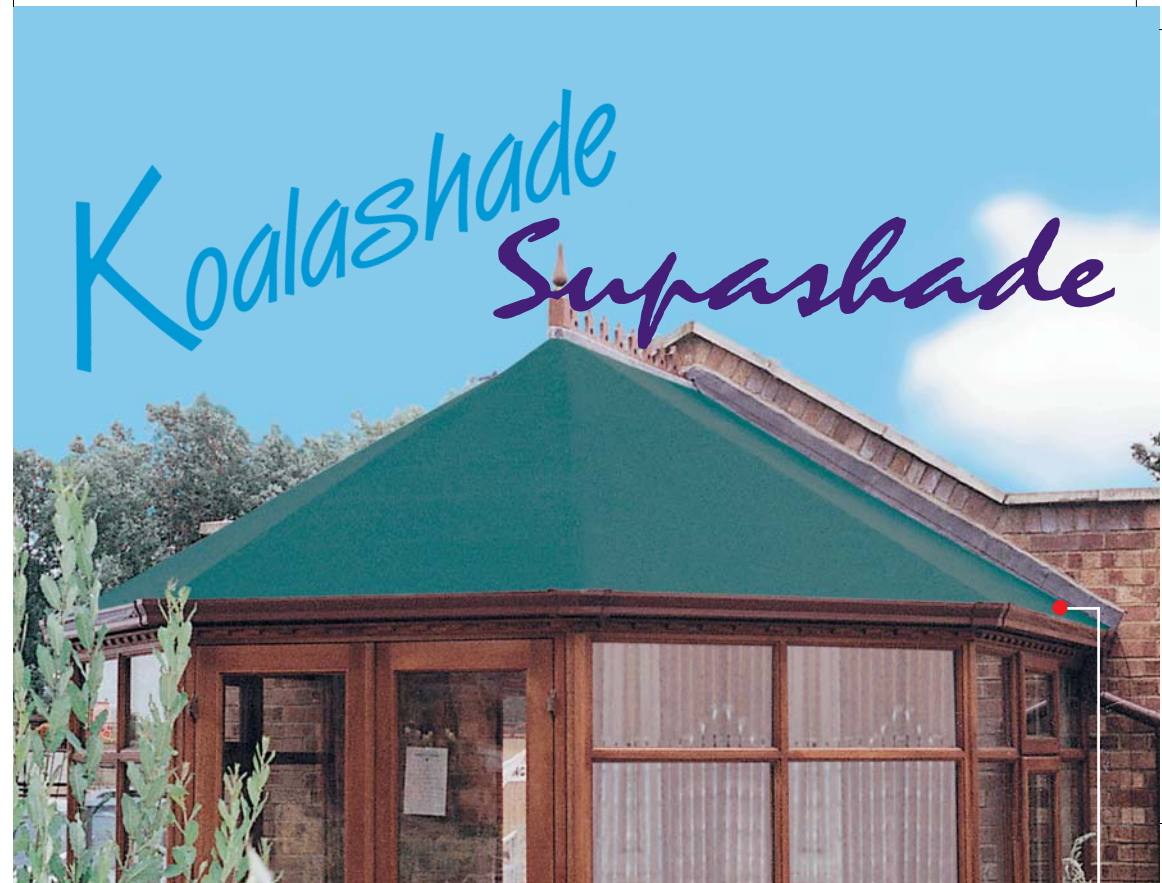

Link cord
Joins two sides of the shade at the back. Drops behind cresting at the wall end or passes over a hook plugged into the wall at ridge height.

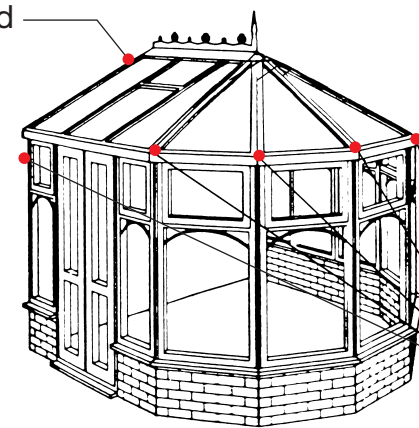

triple-edged shade for strength

Shock cord tensioners

